


GPM 30



Description

GPM 30: anodised aluminium floor grille, blades parallel to "L" side, th. 30 mm


Accessories

SC: volume control damper
B: galvanised steel dust collection basket, depth 200 mm (list price €72)
CT: L-shaped galvanised steel counterframe, of suitable thickness (on request)

Special versions

GPM30 R: like GPM 30 but with adjustable thickness between 30 and 50 mm (list price +20%)
GPMX: made of AISI 304/316 stainless steel
VR: coating according to the RAL table (on request)

GPMSC

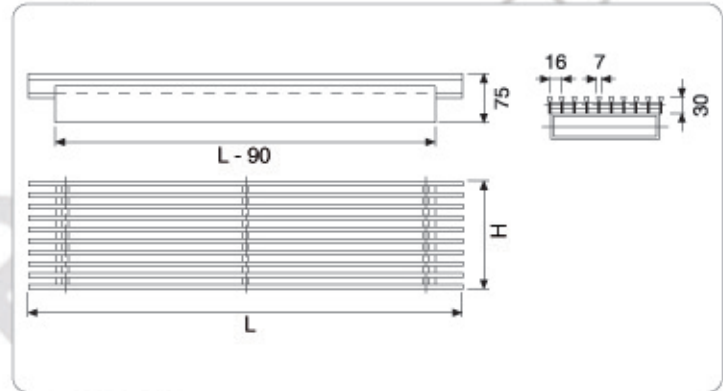

Technical data

Nominal dimensions (BxL) in mm	Vk	0.5	1	1.5	2	2.5	3	3.5	4	p* (daN)
	ΔP	0.4	1	2.5	4	5.5	7	8.5	10	
600x150	Q	80	160	240	320	400	480	560	620	200/300
	NR	< 25	< 25	< 25	< 25	27	31	33	35	
600x200	Q	110	220	330	440	550	660	770	880	200/300
	NR	< 25	< 25	< 25	< 25	27	31	34	36	
600x300	Q	160	320	480	640	800	960	1120	1280	200/300
	NR	< 25	< 25	< 25	< 25	28	32	35	38	
600x600	Q	320	640	960	1280	1600	1920	2240	2560	200/300
	NR	< 25	< 25	< 25	< 25	29	33	36	40	

Key

Q: Air flow rate m³/h
ΔP: Pressure drop (Pa)
Vk: Flow velocity (m/s)

***p:** Walkable load (daN)
NR: noise level

*: the walkable loads indicated for grilles without counterframes resting on T0038 cross-pieces.

The grilles can be classified as K3 grilles (walkable grilles suitable for installation in areas with no vehicle traffic, such as buildings for commercial or public use) according to the UNI EN1253-2 standard and support a load of 200 daN remaining in the elastic range and of 300 daN without breaking.

Floor grilles

LBDF



Description

LBDF: anodised aluminium floor grille, removable blades parallel to the "H" side with 15° deflection, frame with cornice dimensions +10mm and th. 23.6 mm
LBDF: like LBDF but with frame with external cornice dimensions
LBD: like LBDF but with only roll-up blade pack with th. 19 mm

PRICE ON REQUEST

Dimensions

