


Diffusion

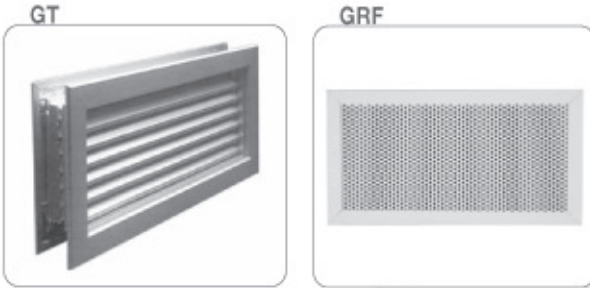

Description

GT: transfer grilles with Δ blades, light shield profile

- including adjustable counterframe
- made of natural anodised aluminium
- fastening with visible screws (not included)

GRF: return grille with perforated panel fastening with snap-on clips

- made of galvanised steel with RAL 9010 finish
- fastening with clips

Accessories

SC: control damper (GRF only) - (SC page 30 +20%)

CT: counterframe

PL/PT: plenum

Special versions


GRF - FV: fastening with visible screws

GRF - X: made of 304/316 stainless steel

GRF - A: made of anodised aluminium

VR: coating according to RAL 9005 / 9006 table
fixed surcharge €30 + 20% per piece

Other RAL colours on request

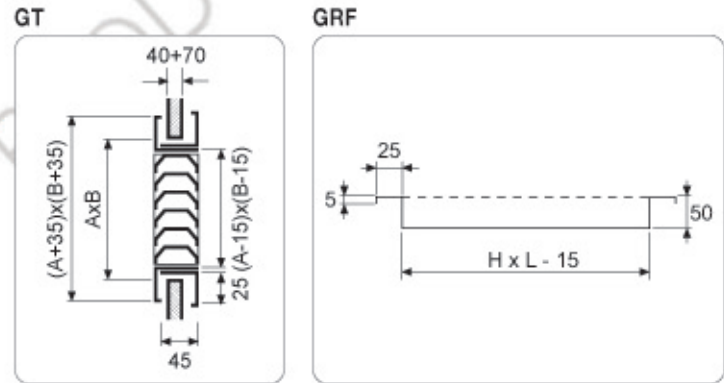

GT selection table

AK (dm ²)	L x H (mm)	Flow rate (m ³ /h)											
		50	60	100	150	200	300	400	500	600	800	1000	
1.0	200x100	15	22										
		1.4	9	1.9	17								
1.6	300x100	-	15	23									
		0.9	3.5	1.2	7	1.7	14						
2.4	300x150	-	-	18	25								
		0.6	1.5	0.8	3	1.2	6	1.7	14				
3.3	400x150	-	-	-	20	26							
		0.6	1.5	0.8	3	1.3	7	1.7	13				
5.6	400x200	-	-	-	18	25	31						
		0.5	1.1	0.7	2.5	1.0	4.5	1.5	10	2.0	18		
7.0	300x300 500x200	-	-	-	22	27	32						
		0.6	1.6	0.8	3	1.2	6.5	1.6	11	2.0	18		
9.0	400x300	-	-	-	16	23	27	32					
		0.6	1.7	0.9	4	1.2	7	1.5	11	1.9	15		
12.0	500x300	-	-	-	20	23	27	33					
		0.7	2	0.9	4	1.2	6	1.4	9	1.9	15		
19.0	600x400	NR											
		Vk	Δ pt										
		0.6	1.5	0.7	2.5	0.9	3.5	1.1	6.0	1.5	10		

The NR values do not take into account room attenuation

GRF: GT data x 0.7