

Fans

BOX-HC



► MOTOR OUTSIDE THE FLOW

Description

BOX-HC: Centrifugal box fan with single inlet (Plug Fan) with motor outside the flow, suitable for extracting hot air with temperatures up to 150°C

- frame with extruded aluminium profiles
- galvanised panelling
- double panels with heat and sound insulation th. 25 mm in polyurethane foam with 40 Kg/m³ density, reaction to fire class "0"
- backward inclined impellers in galvanised steel
- 4 removable panels allow you to direct the air in 4 different directions by drilling the panel
- grease discharge


Accessories

- IS1 on-off safety switch 16A - 600V - IP65 1 speed (list price €222)
- single-phase control REM 600/900
- NE S1 inverter


Dimensions

Size	A	ØD	ØE	L	H
30	500	300	330	500	500
40	560	350	381	560	560
50	630	400	431	630	630
60	710	450	485	710	710
70	760	500	533	760	760


BOX-HC

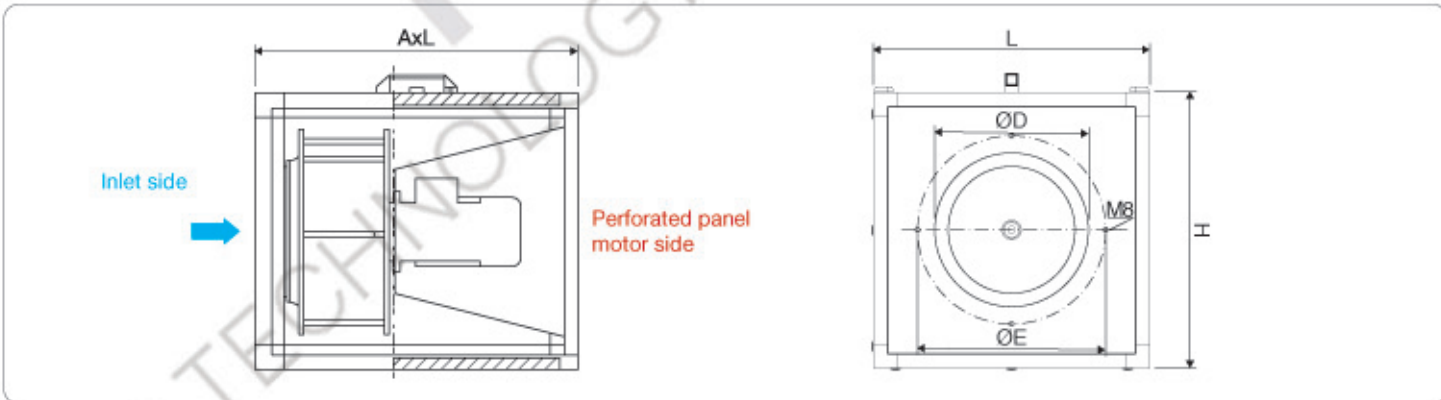


BOX-HC 30 P4 T/M

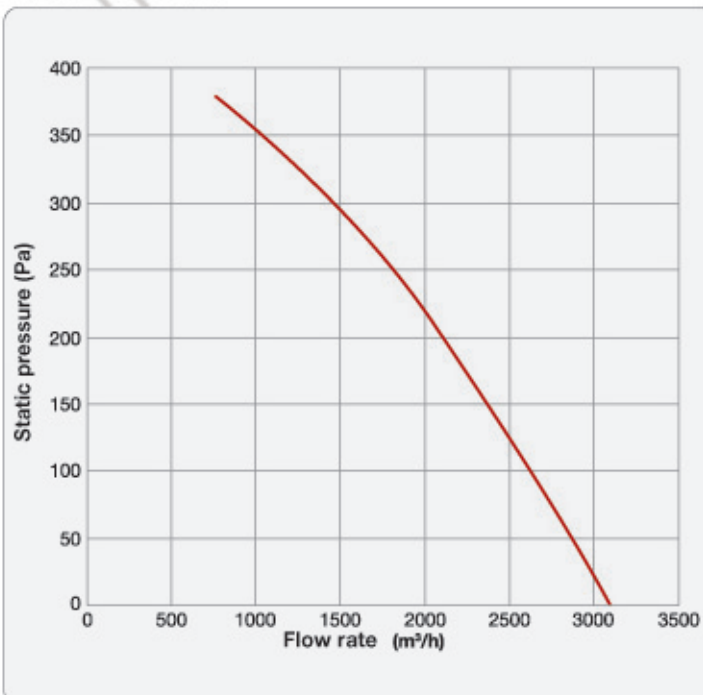


BOX-HC 40 P4 T/M

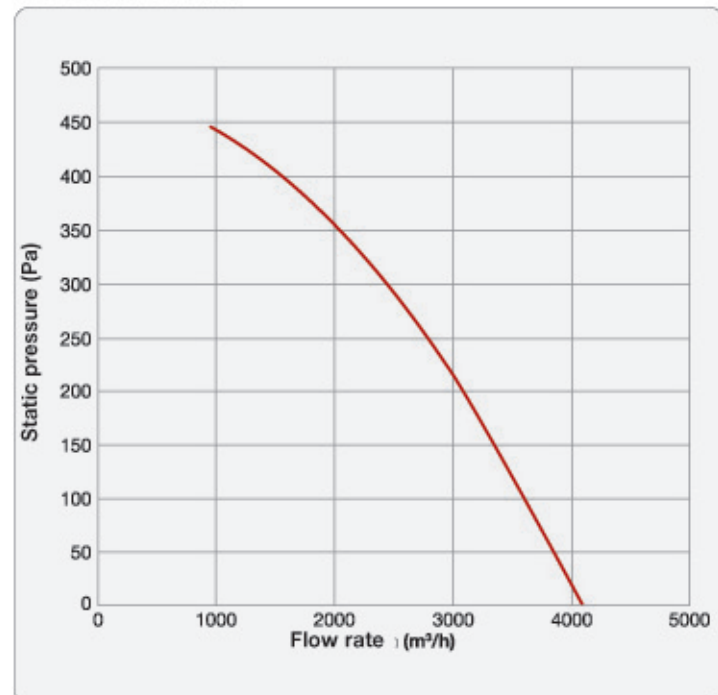

BOX-HC 50 P4 T/M

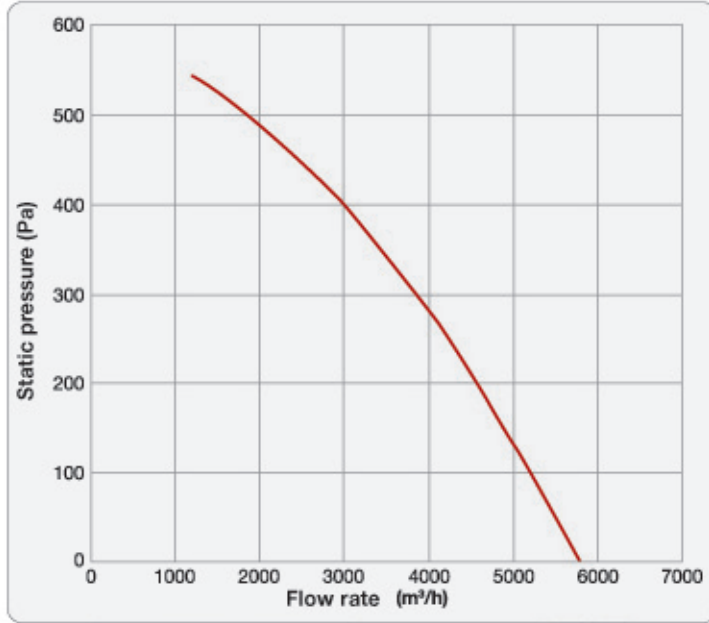

BOX-HC 60 P4 T/M

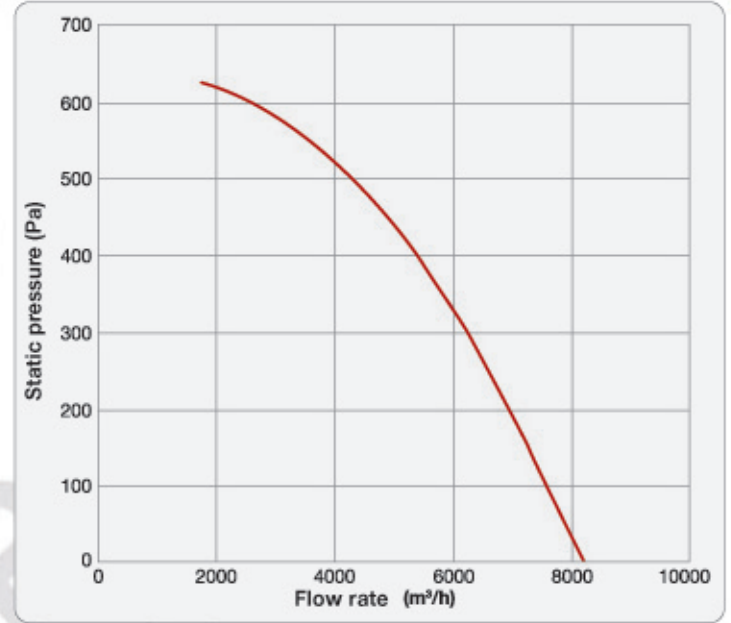

BOX-HC 70 P4 T

