


## GRFPFX



### Description

**GRFPFX:** return grilles in perforate metal sheet suitable for installation in hospital environments in controlled contamination rooms

- made of coated AISI 304 stainless steel with rounded corners and push-pull opening system
- filter holder frame with filter fastening device
- perfect surface uniformity for easy maintenance and cleaning
- possibility of inserting G2 G4 M5 M6 F9 filters


### Accessories

- volume control damper

### Special executions

- made of AISI 316 stainless steel (304 list price +15%)
- opening system with magnet fastening

### Dimensions

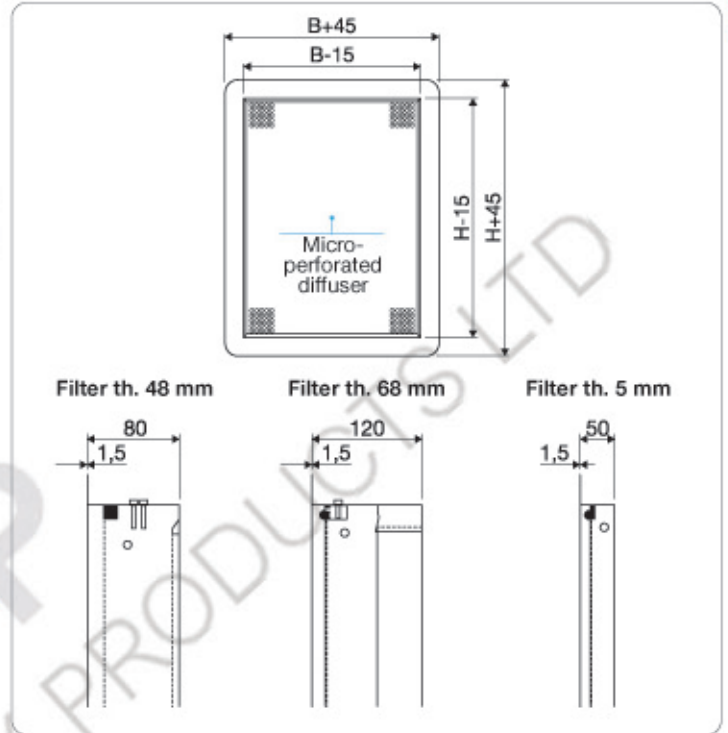

### Dimensions

Dimensions filter	Velocity (m/s)	Filter flow rate (m <sup>3</sup> /h)	Δp G2 filter (Pa) Th. 5 mm	Δp G4 filter (Pa) Th. 48 mm	Δp M5 filter (Pa) Th. 68 mm	Δp F9 filter (Pa) Th. 68 mm	Perforated sheet metal velocity (m/s)	Δp Perforated sheet metal (Pa)
300x300	0.50	162	10	10	20	40	1.25	10
	1.00	324	35	15	20	50	2.50	15
	1.50	486	75	20	30	50	3.75	20
600x300	0.50	324	10	10	20	40	1.25	10
	1.00	648	35	15	20	50	2.50	15
	1.50	972	75	20	30	50	3.75	20
900x300	0.50	486	10	10	20	40	1.25	10
	1.00	972	35	15	20	50	2.50	15
	1.50	1458	75	20	30	50	3.75	20